

# The ALLIANCE REVIEW

September-October 2010

NEWS from the NATIONAL ALLIANCE of PRESERVATION COMMISSIONS

## INSIDE THIS ISSUE

**How Old Buildings Were Designed to Work**

*Bob Yapp*

**Whole House Considerations: Why Today's Decisions Compound Tomorrow's Problems**

*Robert Cagnetta*


**Energy Efficiency and Historic Homes are Not Enemies**

*Joy Sears*

**Incentive Programs for Weatherization**

*Caitlyn Oshida*

# Weatherization

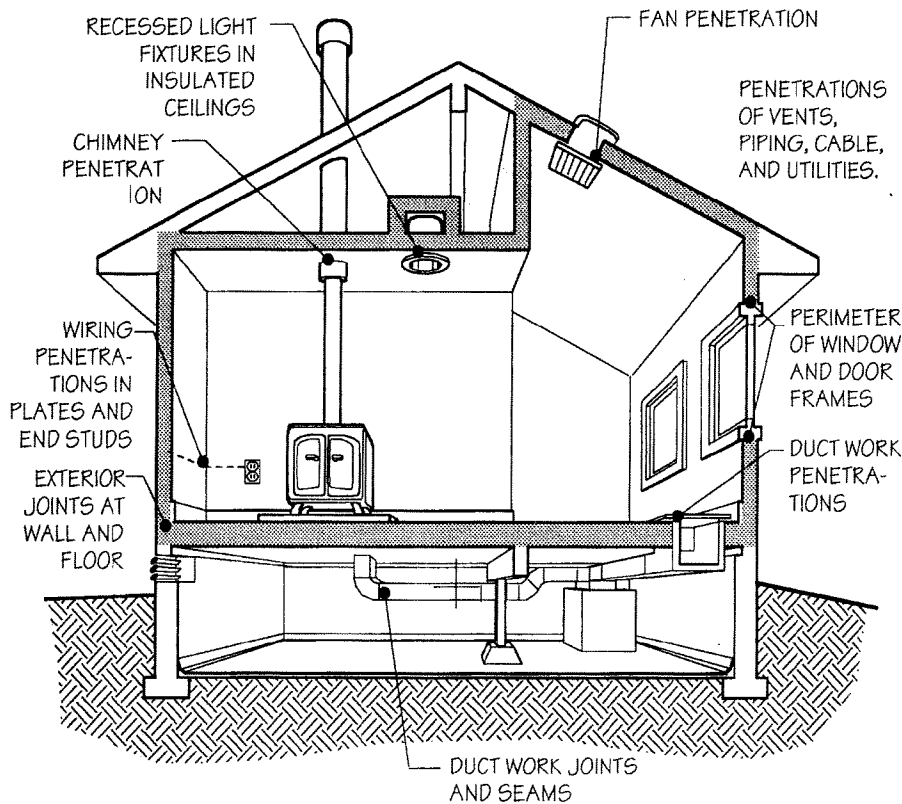

## What every Commissioner Should Know

...and IN EVERY ISSUE:

**Heads Up!  
State News**

## HOW OLD BUILDINGS WERE DESIGNED TO WORK

*Robert Yapp, Belvedere School for Hands-on Preservation*



*Above: Wide eaves and deep porches were designed to manage the sun in both the summer and winter.*

*Below: The moveable upper and low sash in traditional double-hung windows draw heat out of the house and let cool breezes in.  
NAPC file photos*



As I work with and train historic preservation commissions I find that many, if not most, are unintentionally buying into the replacement product industry's mantra that the only way to be energy efficient is to replace the old systems. I call this the big lie. Remember, they call them replacement products because you have to keep replacing them over and over again.

Contrary to what most folks believe about energy efficiency, most old houses and buildings were designed to take advantage of the weather.

### **Eaves**

From the early Victorian era Italianate and Second Empire styles through the Arts & Crafts era (1900 to 1930), wide overhanging eaves were the norm. This feature even continued into the recent past with California ranches. While this element is attractive and allowed for brackets, corbels and later, exposed rafter tails, the original idea was

strictly to manage the sun. In the winter, when the sun is lower in the horizon, sunlight bypasses the wide eaves and comes in through the windows. In the summer, when the sun is high in the sky, the wide eaves help keep the blazing sun from directly bearing down on the inside of the structure. Brilliant? Well, not really. For thousands of years enlightened builders have understood this concept.

### **Windows**

Early builders and architects knew that creating good ventilation was critical to the success of any building. Without cross-ventilation these early structures would have been unbearable to live or work in. Air conditioning as we know it was not available or affordable in this country until the late 1950s and early 1960s. In a way, this introduction was the beginning of the end for our collective knowledge about how our homes were intended to be used.

Double hung windows (one window sash on top and one on the bottom) are the most popular type in the United States and it appears they started showing up in Europe in the late 1400s, primarily as an early air conditioning system. Vintage double hungs have two window sashes that move up and down utilizing a counter balance system with a cast iron weight, and a pulley and rope to connect the weight to the side of the window sash. If you lower the top window sash three inches and raise the lower sash three inches a very interesting thing happens. The heat and humidity leaves the house through the top gap and cooler breezes enter the house through the lower gap.

Now, most of us wouldn't give up our air conditioning, but in most climates when we use our windows in this fashion, we really don't have to turn on the air conditioning until July and it goes off in mid-August. Most property owners can save between 10% and 25% on summer electricity bills without sacrificing much comfort to do so.

In most pre-1960 homes with wood windows, there is also a storm window that protects them. Part of the reason we don't use our windows as air conditioning systems is that we replaced the original wooden storm windows with aluminum, self-storing storms. Folks just got tired of climbing up and down ladders in the spring and fall to switch out glass storms with screen storms. Whoever invented these aluminum storms did so because of this fact.

The problem with this design is that there is only a screen on the bottom and so everyone painted their top window sashes shut. Not only did this stop people from using their double-hung windows as air conditioning, the windows got much less use and people didn't pay much attention to maintenance issues.

One of the primary problems I have with new double paned (insulated glass) windows—wood or vinyl—is they have no storms. Your interior double hung units, old or new, were never intended to take a direct hit from the weather. From the 1400s until around the 1870s most windows had wooden storm shutters. Then wooden storm windows and screens were invented in favor of shutters. These were more practical than hassling with closing the shutters every time a storm was coming.

The good news is that there are now combination wooden storms that are either self-storing or have glass that can be taken out of the wood frame from inside the house. No more trudging up and down the ladder to change storms and screens twice a year. These storms also have full screens so your windows can be used as they were intended.

It will take a consumer 20 to 50 years to get any payback (saving enough energy to pay for the new windows) from replacement windows with double paned glass. A restored and weather-stripped original wood window with a wood or aluminum storm will be more energy efficient than a replacement double hung with double paned (insulated) glass. Considering the following statements in the window industries trade magazine, *Glass Magazine*, they make the case for restoration.

July 2001, *Glass Magazine*, By Editor, Charles Cumpston:

"The consumer's perception of glass is significantly different from the industry's. While some in the industry think a 15-year life is adequate, it is the rare homeowner who envisions replacing all his windows in 15 years."

Another *Glass Magazine* article from 1995 by Ted Hart states:

"Remember our industry, with rare exception, has chosen to hide the fact that insulating glass does have a life expectancy. It is a crime that with full knowledge and total capability to build a superior unit, most of the industry chooses to manufacture an inferior single-seal unit."

Single seal units are still the norm in plastic/vinyl and most stock wood windows with an average seal life of two to six years according to accelerated testing by the flat glass manufacturer, IG Cardinal. About 12 million replaced window sashes end up in our landfills every year. While most of these are original old growth wood sashes, more and more are windows less than 15 years old.

Consider that heat and air conditioning loss through windows accounts for only 12% to 15% of energy loss in a structure. This is a small percentage when you understand

### Storm Windows: Wood versus Metal

Even though wood storm windows are more historically accurate for buildings constructed before the advent of aluminum storm windows, and even though they may provide greater energy efficiency because of wood's greater insulating properties, it may not always be realistic to require property owners to use them instead of aluminum models. Wood storm windows usually have to be custom-made, putting them outside of many property owners' budgets. Additionally, even if removable glass and screen inserts are used, wood storm windows require more maintenance than readily available aluminum models and some property owners may not be physically capable of doing it themselves and unable to afford to hire someone to do it for them.

Property owners who see wood storm windows as a long term investment, but are unable to make the financial commitment without taking out a second mortgage have some options. Local high school or community college vocational education programs may have woodworking classes whose instructors are willing to have them make the windows for a lower price than a craftsman in order to give their student valuable experience. Property owners with sufficient spare time and skills can make the windows themselves, thus greatly reducing the cost. The investment can also be spread out over several years, replacing two or three aluminum storm win-

